

Designed as a dimensional alternative to the 1900G, Thermodyne's 1900DW offers additional space for side by side pan placement along with double doors for tight areas that require a narrow door swing. Using patented Fluid Shelf® technology, food quality and safety are a sure thing.



SPECIFICATIONS			
EXTERIOR DIMENSIONS	774.70W	x	657.35D x 1905.00H
INTERIOR DIMENSIONS	673.10W	x	571.50D x 1485.90H
MAX OPERATING TEMP	110°C		
NET WEIGHT	203.66kg.		
SHIPPING WEIGHT	253.86kg.		
ELECTRICAL SPECIFICATIONS			
VOLTS	220	230	240
AMPS	27	28	29
TOTAL WATTS	5880	6370	7000
HERTZ	50	50	50
PHASE †	1	1	1
PLUG	BS4343 / 32A-6h		



† 3Ø Option, TD0003
380V = 7.2 AMPS / 400V = 7.6 AMPS / 415V = 8 AMPS (CE)

SHELVES		
STANDARD	10	
CAPACITIES		
	STANDARD	MAXIMUM*
GASTRONORM PAN		
GN 1/1 65mm	20	28
GN 1/1 100mm	20	20


*Maximum capacities are based on additional shelving. Capacities vary depending on shelf quantities, spacing, and pan depth.

OPTIONS / ACCESSORIES	
Protective Bumper Base	Additional Heat Transfer Plates
Solid Back Panel	Stainless Steel Drip Pan

Specifications subject to change without notice.

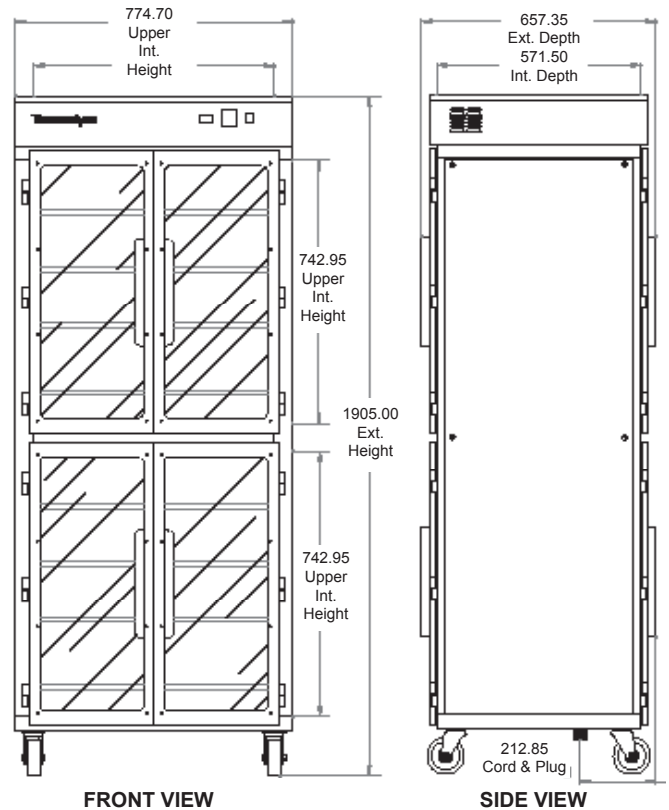

Patented REV. 11/15

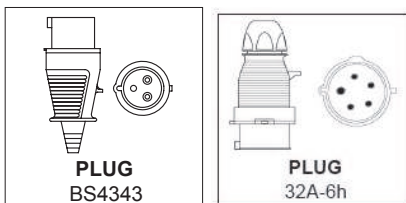

Compass International Co. Inc., International Sales / 2413 Pond Branch Road, Leesville, SC 29070 USA
Tel: ++1-803-359-1226 / Fax: ++1-803-359-1245 / Email: thermodyne@compassintlco.com

www.tdyne.com

UK Sales: Kitchen & Restaurant Projects.

+44 07398 88224
Rob.Gibson@kandrprojects.co.uk / www.kandrprojects.co.uk

FluidShelf
Precision Heat Transfer System