



The high performance 700DP creates a revolutionary concept in automated foodservice equipment. With Thermodyne's 700DP, it is now possible to refrigerate, automatically reheat and hold prepared foods, with no food service attendant required. The 700DP can be custom programmed for different meal times for every day of the week.

SPECIFICATIONS			
EXTERIOR DIMENSIONS	889.00W	x	750.82D x 1301.75H
INTERIOR DIMENSIONS	673.10W	x	635.00D x 577.85H
MIN OPERATING TEMP	2°C		
MAX OPERATING TEMP	110°C		
NET WEIGHT	195.9kg.		
SHIPPING WEIGHT	231.3kg.		
ELECTRICAL SPECIFICATIONS			
VOLTS	220	230	240
AMPS	16	17	18
TOTAL WATTS	3654	3984	4350
HERTZ	50	50	50
PHASE	1	1	1
PLUG	BS4343 / 32A-6h		
SHELVES			
STANDARD	5		
CAPACITIES			
GASTRONORM PAN			
GN 1/1 65mm	10		


Specifications subject to change without notice.

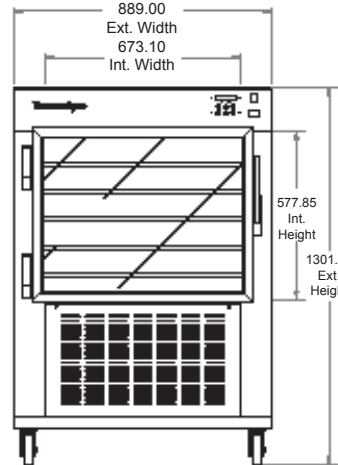

FRONT VIEW

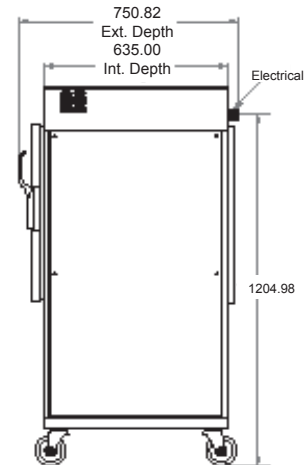


SIDE VIEW

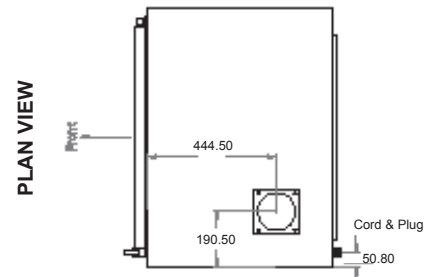

PLAN VIEW

Patented REV. 11/15

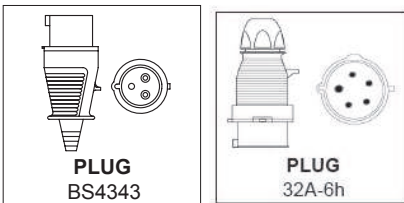

Compass International Co. Inc., International Sales / 2413 Pond Branch Road, Leesville, SC 29070 USA
Tel: ++1-803-359-1226 / Fax: ++1-803-359-1245 / Email: thermodyne@compassintlco.com

www.tdyne.com

UK Sales:

Kitchen &
Restaurant
Projects.

+44 07398 885224

Rob.Gibson@kandrprojects.co.uk / www.kandrprojects.co.uk

FluidShelf
Precision Heat Transfer System